


Flexible Metal Conduit

Construction

- Galvanized steel core, non liquid tight
- Square lock style

Application



- Used with a variety of set-screws
- Offer good mechanical protection to wiring in a variety of applications

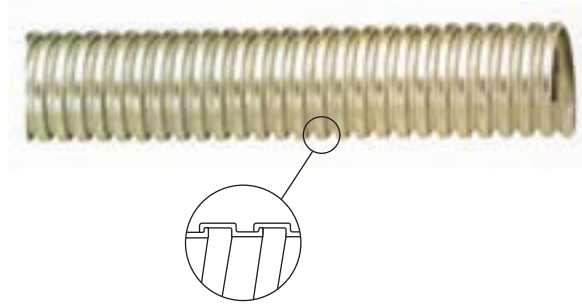

Technical Table

Code	Size	Inside Diameter		Outside Diameter (over Jacket)		Min Bend Radius	Length of Reel	Connector
		Min (mm)	Max (mm)	Min (mm)	Max (mm)			
ST16	16	15.8	16.3	19.2	19.7	38	30	Depending on Application SCM"\$" - Fixed FKCFM"\$" - Fixed FKCSM"\$" - Swivel
ST20	20	20.7	21.2	24.5	25.1	45	30	
ST25	25	26.0	26.6	30.4	31.0	55	30	
ST32	35	34.7	35.4	39.6	40.3	62	30	

"\$" = Size in mm

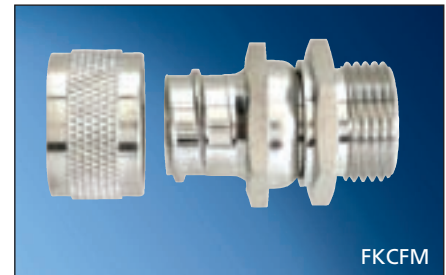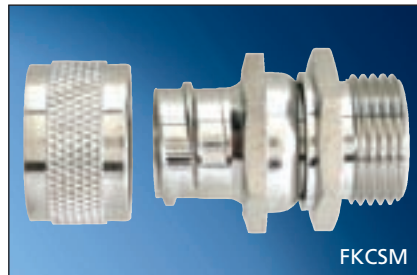


Liquid Tight Flexible Steel Conduit

Construction

- Galvanized steel core, corrosion resistant
- Liquid tight PVC jacket, flexible, flame retardant, impact resistant

Application

- Used with a variety of set-screws
- Offers good mechanical protection to wiring in a variety of applications
- Working temperature -10°C – 70°C

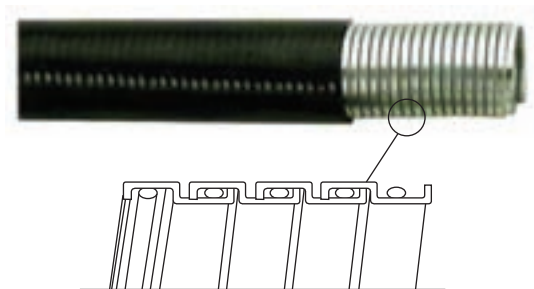

Technical Table

Code	Size	Inside Diameter		Outside Diameter (over Jacket)		Min Bend Radius	Length of Reel	Connector
		Min (mm)	Max (mm)	Min (mm)	Max (mm)			
KT20\$	20	15.80	16.30	20.80	21.30	80	30	Depending on Application KCM"\$" – Flex FKCFM"\$" - Fixed FKCSM"\$" - Swivel
KT25\$	25	20.70	21.20	26.20	26.70	100	30	
KT32\$	32	26.20	26.80	32.70	33.40	150	30	

"\$" = Size in mm Colours : Black, Grey, Orange

