


SFC Arrowhead Cradle

Features and Benefits

Arrowhead fixing for use in pre-drilled or punched holes. Provides secure cradle for use with HellermannTyton cable ties. SFC and SFC2 for ties up to 4.8 mm width. SFC3 will accept ties up to 8 mm width.

Application

Offering simple and easy methods of securing cables or pipes these fixing accessories have many applications within a wide range of industries.

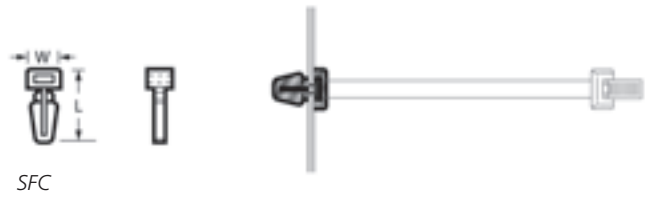

SFC



SFC2



SFC3

Material Data

RoHS	Material	Polyamide 6.6 (PA66)
	Operating Temperature	-40°C to +85°C Continuous, (+105°C for 500 h)
	Flammability	UL94 V2

Product Selection

Code	Length (L)	Width (W)	Fixing Hole Ø (FH)	Panel Thickness min.	Panel Thickness max.	Material	Colour
SFC	18.0	11.0	6.0	–	3.2	PA66	Natural (NT)
SFC2	14,5	6.0	6.0	–	1.0	PA66	Natural (NT)
SFC3	7.3	22.0	6.3	0.8	1.8	PA66	Natural (NT)
SFC3	7.3	22.0	6.3	0.8	1.8	PA66	Black (BK)

All dimensions in mm. Subject to technical changes.